



TOUGH STUFF

Cargo Control & Trailer Products

Catalog Listing of our Quality Products

**Ridgeback Products Inc.
610 Monroe Ave
Memphis, TN 38103
Main: 901-521-1040
Direct: 512-228-0623**

Weld-on Hinges

RDFO

Heavy Duty Greaseable Strap Hinge - Plain

- Raw steel construction
- Plain finish



Recessed Pan Fittings

RPF8-R

Rotating Recessed Folding 6K Tie-Down Ring

- 6-1/8" Outside diameter
- 4-1/2" Drop outside diameter
- 1-1/8" Drop
- 11/32" Mounting holes on 5-3/8" circle centers
- 1/4" Diameter drain holes (4)
- Zinc plated finish
- 6,000 lbs. Capacity



RPF8-SQ

Recessed Folding 6K Tie-Down Ring

- 4-7/8" x 4-1/2" x 7/8"
- Square Mounting holes on 3-1/4" x 3" centers
- Zinc plated finish
- 6,000 lbs. Capacity
- **BACKING plate available (RPF8-BP)**



RPF9

Recessed Pan Fitting 1.2K Tie-Down Ring

- 4" diam x 0.472"
- Zinc plated finish
- 1,200 lbs. Capacity




D-Rings and Rope Rings

RFTDA12BB

Forged 1/2" Lashing D-Ring


- 1/2" x 3-3/8" Wide x 3-1/2" long outside dimension d-ring
- Bolt-on bracket
 - 1-3/4" Wide x 3/16" thick
 - 2" Hole centers
 - Accepts 3/8" carriage bolts
- 4,000 lbs. Capacity, 12,000lbs Break

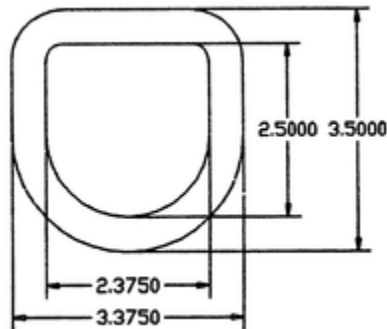

RFTDA12

Forged 1/2" Lashing D-Ring


- 1/2" x 3-3/8" Wide x 3-1/2" long outside dimension d-ring
- Forged Weld-on bracket
- 4,000 lbs. Capacity, 12,000lbs Break

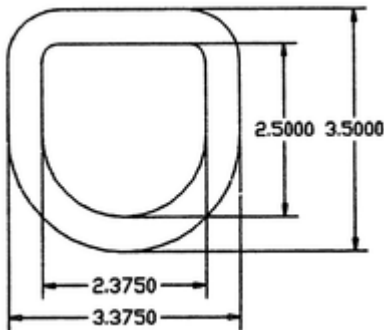

RFTDA58

Forged 5/8" Lashing D-Ring with Bracket

- 5/8" x 4-1/4" wide x 4-1/4" long outside dimension d-ring
- Forged Weld-on bracket is 2-1/2" wide x 3/8" thick
- 6,000 lbs. Working Load Limit
- 18,390 lbs. Breaking Strength
- Not intended for lifting

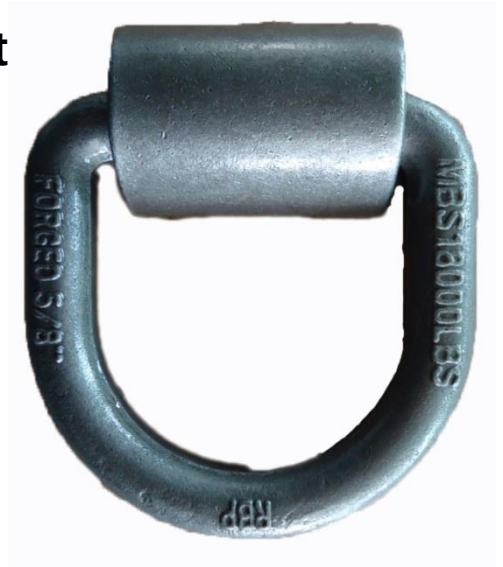

RFTDA34

Forged 3/4" Lashing D-Ring with Bracket 4.5" x 4.5"

- 3/4" x 3" wide x 3" long inside dimension d-ring
- 3/4" x 4.5" wide x 4.5" long outside dimension d-ring
- Weld-on bracket is 2-1/8" wide x 3/8" thick
- 9,120 lbs. Working Load Limit
- 26,500 lbs. Breaking Strength
- Not intended for lifting





RFTDA10L

Forged 1" Lashing D-Ring with Bracket 5" x 6"

- 1" x 3" wide x 4" long inside dimension d-ring
- 1" x 5" wide x 6" long outside dimension d-ring
- Weld-on bracket is 2-1/8" wide x 3/8" thick
- 15,586 lbs. Working Load Limit
- 46,760 lbs. Breaking Strength
- Not intended for lifting
- AVAILABLE IN BENT VERSION

RFTDA10B

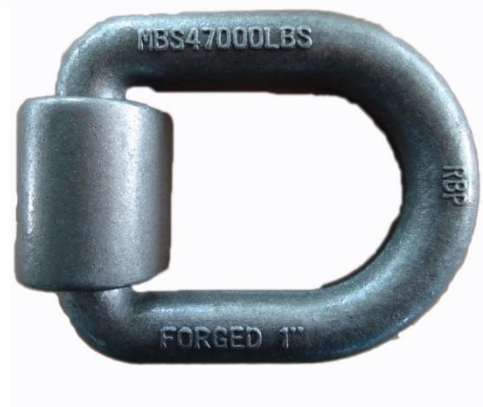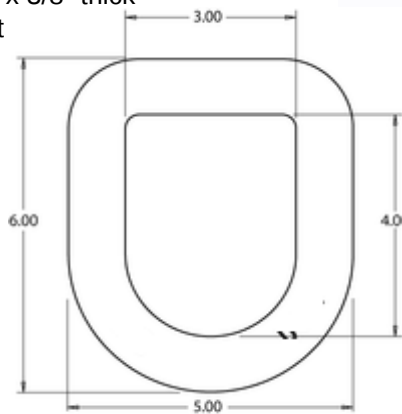

RRR1200

Surface Mount Rope D-Ring

- .225" x 1-1/2" x 1-1/2" D-ring
- 10 Gauge bracket 9/32" holes on 1-3/8" centers
- Zinc finish
- 1,200 lbs. Capacity



Misc Trailer Parts

FBZ

Gate Stud with lanyard receiver

- .Forged for high strength
- 2-5/8" length
- 0.30" locking pin thru hole
- Zinc finish (Silver or Yellow)



FCA6-39

1/4" Spring Pin

- Forged for high strength
- 1.5" length
- Optional Safety Lanyard
- Zinc finish (Silver or Yellow)



NACM 3:1SF Trailer Safety Chains-All w/ **Safety Latch**

G30 Chain

RCA3-30B-1SS

1/4" x 30" chain assembly with S-Hook

- 5,200lb Rating BS

G43 Chain

RCA4-30B-1CS

1/4" x 30" chain assembly with Clevis Hook

- 7,800lb Rating BS

RCA4-36C-1CS

5/16" x 36" chain assembly with Clevis Hook

- 11,700lb Rating BS

RCA4-30D-1CS

3/8" x 30" chain assembly with Clevis Hook

- 16,200lb Rating BS

RCA4-36D-1CS

3/8" x 36" chain assembly with Clevis Hook

- 16,200lb Rating BS

G70 Chain

RCA7-32B-1CS (special order)

1/4" x 32" chain assembly with Clevis hook

- 12,600lb Rating BS

RCA7-36C-1CS (special order)

5/16" x 30" chain assembly with Clevis hook

- 18,800lb Rating BS

RCA7-30D-1CS

3/8" x 30" chain assembly with Clevis hook

- 26,400lb Rating BS

RCA7-36D-1CS

3/8" x 36" chain assembly with Clevis Hook


- 26,400lb Rating BS

E-Track Products

RTDS

E-Track D-Ring 1K WLL


Series E & A Fitting with D-Ring (breaking strength 3,000 lbs and work load limit of 1,000 lbs).

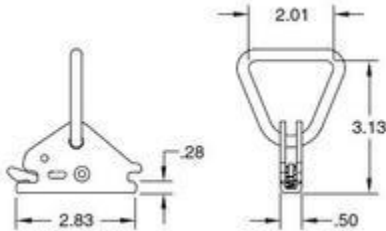

RTD8

E-Track O-Ring 1K WLL


- Series E & A Fitting with O-Ring
- 3,000 lbs BS
- 1,000 lbs WLL
- Higher loads achievable in different directions
- of pull and using stronger track configurations.

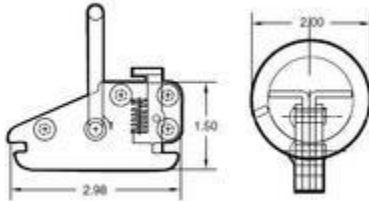

RWBS-1

Heavy Duty E-track Wood Beam Socket

- 1400lb BS
- 2" Wide x 6" long strap
- Spring Clip
- Fits standard "E-track"



RLS6-RTS

2" x 6" E-Track Rope Tie

- 2" Wide x 6" long strap
- D-Ring
- Fits standard "E-track"



RETH-P

E track p

10' horiz painted green



RETH-G

E track g

10' horiz galvanized

RTD11-RTS-16 (Gray)

2" x 16' E-Track ratchet strap

- Stiff 2" Wide x 16' long strap
- E-track clip on each end
- Fits standard "E-track"
- Webbing Color: Gray
- Available in other lengths and colors



RTD11-RTS-20 (Blue)

2" x 16' E-Track ratchet strap

- Stiff 2" Wide x 16' long strap
- E-track clip on each end
- Fits standard "E-track"
- Webbing Color: Blue



RCD-RTS-16 (Gray)

2" x 16' E-Track cam buckle strap

- Stiff 2" Wide x 16' long strap
- E-track clip on each end
- Fits standard "E-track"
- Webbing Color: Gray
- Available in other lengths and colors
-



2

**We can offer various Cargo Bars and Shoring Bars.
Too many to list.**

Flatbed Accessories

RRB4-38

5/16" - 3/8" Chain Load Binder with Ratchet WLL 5.4K

- Ratcheting Chain Load Binder with Lever
- Accepts transport chains (5/16") up to high test chains (3/8")
- 5,400 Lbs working load limit
- Paint Finish: Red
- Available in 6.6K WLL (painted orange)
- Available in other Chain capacities and Grades
 - ⇒ 1/4-5/16"
 - ⇒ 3/8-1/2"
 - ⇒ 1/2-5/8"



RLB4-38

5/16" - 3/8" Chain Load Binder Lever WLL 5.4K

- Chain Load Binder Lever
- Accepts transport chains (5/16") up to high test chains (3/8")
- 5,400 Lbs working load limit
- Paint Finish: Red



RCA7-240C-2G

GR70 CHAIN TRANSPORT 5/16"x20' W/ GRAB HOOKS 8MM
4,700lbs WLL
18,800lbs BS



RCA7-240D-2G

GR70 CHAIN TRANSPORT 3/8"x20'
6,600lbs WLL
26,400lbs BS

RTCR1

Light Duty Coil Rack

- Steel
- Powdercoat finish
- 4.62lbs



RSCP

Steel Edge Protector

- Use with Webbing or Chain
- 4" wide Standard
- 2" and 3" available
- Zinc plated



RSCP-R

Rubberized Steel Edge Protector



RPCS1 and RPCS2(HD)

Plastic Edge Protector

- Use with Webbing or Chain
- 4" Standard
- 2" and 3" available
- Available in White(standard), Blue, Red, Orange



Winch All Available in Low(L), Standard(S), High(H)

RWSC

Sliding Winch for 4" Straps – Bottom Mount

Standard Portable Bottom Mount (SBM) Hi Profile Sliding Trailer Winch

- Holds up to 4" wide straps
- Position where needed
- Fit either steel or aluminum track
- Stores up to 30' of web strap



RWW

Side Mount Weld-On Trailer Winch

- Holds up to 4" wide straps
- Stores 30' of web strap
- Black Powder Coated



RWP

Portable Strap Winch – Side Mount

- Holds up to 4" wide straps
- Stores up to 30' web strap
- Includes 2 locking set screws
- Black Powder Coated



RWSW

Wilson(W) Sliding Winch

- Holds up to 4" wide straps
- Stores up to 30' web strap
- Black Powder Coated



RWSL

Double L Sliding Winch

- Holds up to 4" wide straps
- Stores up to 30' web strap
- Black Powder Coated



RTWB-SBL

Tapered and Angled Winch Bar 34" Black painted

- Tapered and angled at the end for easy operation
- 34-Inch Knurled at two sections
- Grooved tip to improve grip in the winch
- Heat-treated for extra strength
- Release chain load binders and tension winches
- Not to be used as a cheater bar to tension load binders



RTWB-CC

Tapered and Angled Combination Winch Bar/Chain Binder 34"

- Tapered and angled at the end for easy operation
 - Combination Box End
 - 34-Inch Knurled at two sections
 - Grooved tip to improve grip in the winch
 - Heat-treated for extra strength
 - Release chain load binders and tension winches
 - Not to be used as a cheater bar to tension load binders



WTCS

6-ft Steel C-Track Sliding Winch Track

Steel, weld-on c-slider track is used in conjunction with slider winches to give the load operator more versatility when securing the load correctly by strategically moving the winches where they need to be. Engineered with a tighter fit which stabilizes the winch in the track. Sold in 6-ft lengths.



Ratchet Straps

We can put most any end hook or ring on our ratchets and winch straps.

RTD21-FH-RSH250T-8

2" x 8' Flat & Twisted Snap Hook Chassis Strap

- 8' Length
- 2" Width
- 6,000 Lbs. capacity MBS / 2,000lbs WLL
- Twisted snap hook on one end of strap
- Flat "J" hook on one end of strap
- 12" Axle protector sleeve(buffer tube)
- Adjustable position d-ring
- Short wide 2" Handle ratchet



RTD22-RSH26-8

2" x 8' Snap Hook Chassis Strap

- 8' Length
- 2" Width
- 6,000 Lbs. capacity MBS / 2000 lbs WLL
- Snap hook on each end of strap
- 12" Axle protector sleeve (buffer tube)
- Adjustable position d-ring
- Short 2" Handle ratchet



RTD20-FC-15

2" x 15' Ratchet Strap Assembly with Flat Hooks

- Ratchet Strap Assembly
- 2" Ratchet Buckle Strap Webbing
- Long-Wide Handle Ratchet Buckle
- Working Load Limit 3,333 lbs / Minimum Break Strength 10,500lbs
- 15-Ft Long
- Flat Hooks
- Fixed End 18" FLAT HOOKS



RTD20-FC-27

2" x 27' Ratchet Strap Assembly with Flat Hooks

- Ratchet Strap Assembly
- 2" Ratchet Buckle Strap Webbing
- Long-Wide Handle Ratchet Buckle
- Working Load Limit 3,333 lbs / Minimum Break Strength 10,500lbs
- 27-Ft Long
- Flat Hooks
- Fixed End 18" FLAT HOOKS



RTD20-W-27

2" x 27' Ratchet Strap Assembly with J-Hooks

- Ratchet Strap Assembly
- 2" Ratchet Buckle Strap Webbing
- Long-Wide Handle Ratchet Buckle
- Working Load Limit 3,333 lbs / Minimum Break Strength 10,500lbs
- 27-Ft Long
- J-Hooks
- Fixed End 18" FLAT HOOKS



RTD20-FC-30

2" x 30' Ratchet Strap Assembly with Flat Hooks

- Ratchet Strap Assembly
- 2" Ratchet Buckle Strap Webbing
- Long-Wide Handle Ratchet Buckle
- Working Load Limit 3,333 lbs / Minimum Break Strength 10,500lbs
- 30-Ft Long
- Flat Hooks
- Fixed End 18" FLAT HOOKS



RTD20-W-30

2" x 30' Ratchet Strap Assembly with J-Hooks

- Ratchet Strap Assembly
- 2" Ratchet Buckle Strap Webbing
- Long-Wide Handle Ratchet Buckle
- Working Load Limit 3,333 lbs / Minimum Break Strength 10,500lbs
- 30-Ft Long
- J-Hooks
- Fixed End 18" FLAT HOOKS



Winch Straps / Replacement Straps

RWS2-W-30

2" x 30' Winch Strap with Wire Hook

- 2" x 30-ft 11,000 Capacity Webbing
- Working Load Limit 3,333 lbs / Min. Break strength 10,000lbs
- Flat Hook



RWS2-FC-30

2" x 30' Winch Strap with Flat Hook

- 2" x 30ft 11,000 Capacity Webbing
- Working Load Limit 3,333 lbs / Min. Break strength 10,000lbs
- Flat Hook



RWS4-FC-27

4" x 27' Winch Strap with Flat Hook

- 4" x 27-ft 20,000 Capacity Webbing
- Working Load Limit 5,400 lbs / Min. Break strength 16,200lbs
- Flat Hook



RWS4-FC-30

4" x 30' Winch Strap with Flat Hook

- 4" x 30-ft 20,000 Capacity Webbing
- Working Load Limit 5,400 lbs / Min Break Strength 16,200lbs
- Flat Hook



Tow Straps

FDG220

2" x 20' Tow Strap with Safety Clevis hooks

- Working Load Limit 3,333 lbs / Min. Break strength 10,000lbs
- 1 clevis hook on each end.



FDH220

2" x 20' Eye-Eye Tow Strap

- Working Load Limit 3,333 lbs / Min. Break strength 10,000lbs
- Eyelets for attaching to Clevis hooks, shackles and other safe attachments existing on vehicle.

FDH320

3" x 20' Eye-Eye Tow Strap

- Working Load Limit 4,333 lbs / Min. Break strength 13,000lbs
- Eyelets for attaching to Clevis hooks, shackles and other safe attachments existing on vehicle.

FDH420

4" x 20' Eye-Eye Tow Strap

- Working Load Limit 5,000 lbs / Min. Break strength 15,000lbs
- Eyelets for attaching to Clevis hooks, shackles and other safe attachments existing on vehicle.



Trailer Jacks

RJA2000-15P

- Top wind 2000lb A-Frame trailer Jack
- Bracket height: 8"
- Weld-on or bolt on bracket.
- 22" retracted height. Lift range: 15"+
- black e-coat.

Available in 5000lb version (RJA5000-15P)



ELK-12K

10,000lb Lift / 12,000lb Static Spring loaded Drop-leg Jack

- 1 Speed system
- Spring Loaded Front Pin (side pin available upon request)
- Rated Travel: 15" Retracted height: 28.50"
- Aluminum handle
- Black Powder Coated
- 2 grease zerts



ELK-50K2S

25,000lb Lift / 25,000lb Static Drop-leg Jack Landing Gear

- 2 Speed system
- Spring Loaded
- Travel: 15" Retracted height: 28.50"
- 60-68" connecting rod
- Long Aluminum handle
- Black Powder Coated
- 2 grease zerts

